



■ Symbol




Used to automatically exclude the lower part of pipe, refrigeration air dryer, Oily water separator, air storage and all kinds of air filters the accumulated water at the bottom, can be installed artificial sewage discharge in place, in the not easy as high, low, narrow; especially installed on more gas, water frequently place, can prevent artificial drainage forgotten caused by compressed air is condensed water re pollution.

Automatic drainage
Stop gas drainage
Manual drain
The cup is equipped with a metal shield

■ Specification

Model	AD402-02	AD402-03	AD402-04
Ensured pressure resistance	1.5Mpa		
Operating pressure	0.15Mpa~1.00Mpa		
Ambient and fluid temperature	5~60℃		
Port size	G1/4"	G3/8"	G1/2"
Drainage aperture	G1/8"		
Drainage condition	Normally open type		
working medium	Compressed air		

■ Overall Dimension

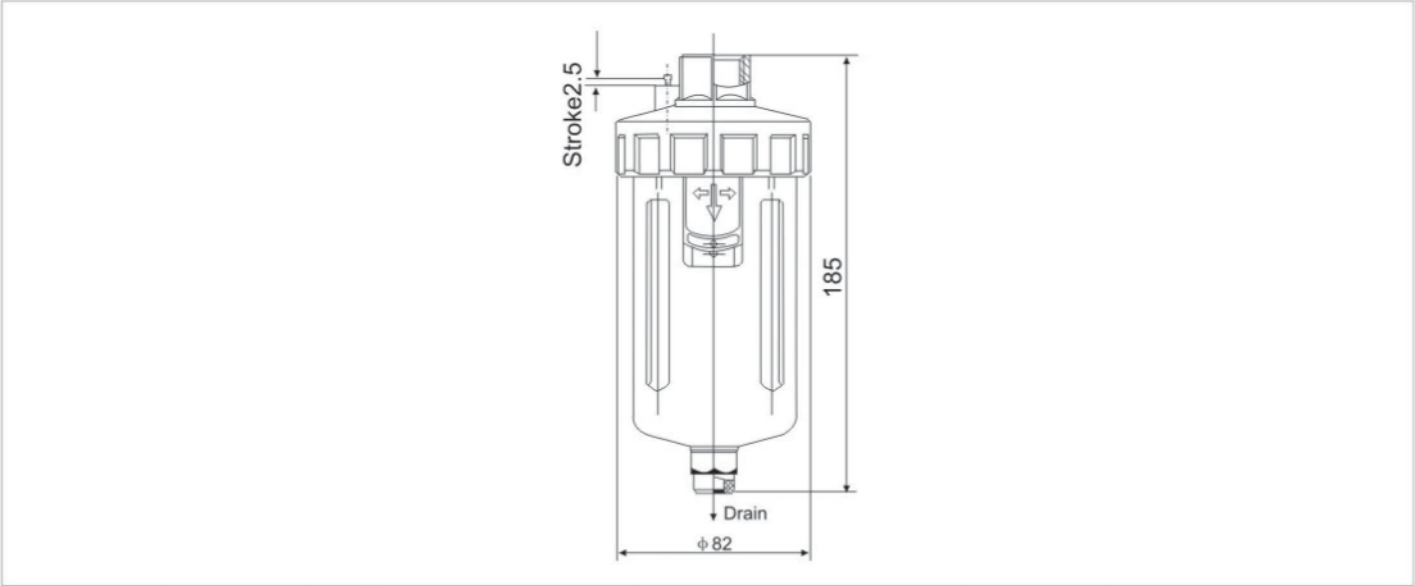

Matters needing attention

When in use, must be installed vertical position, and the drain down.