


AF、BF Series air filter combination (Filter)



Specification

Model	AF1500	AF2000	BF2000	BF3000	BF4000
Working Medium	Air				
Port size	PT1/8	PT1/4	PT1/4	PT3/8	PT1/2
Filter precision	40μm or 5μm				
Working pressure range	Semi-auto and automatic drain : 0.15~0.9MPa (20~130Psi) Manual drain : 0.05~0.9MPa (7~130Psi)				
Ensured pressure resistance	1.5MPa (215Psi)				
Operating temperature range	-20~70℃				
Capacity of drain bowl	15CC		60CC		
Weight	140g		330g		

Ordering code

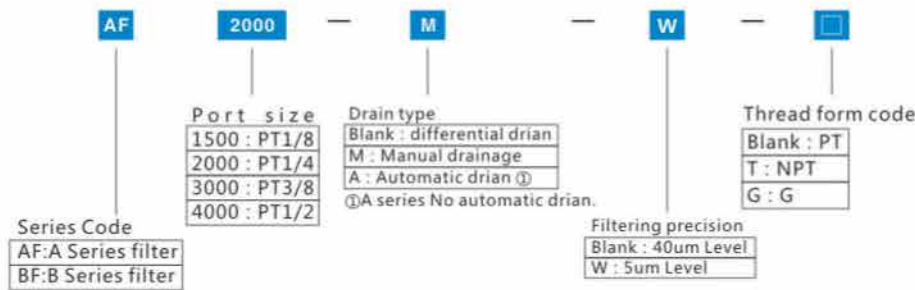


Symbol




Flow characteristics

Product Performance

- AF series
- 1, light and compact structure;
 - 2, small pressure loss, high efficiency of water;
 - 3, the filtering precision is 5μm, 40μm optional.
- BF series
- 1, small pressure loss, high efficiency of water;
 - 2, the cup outside the high strength plastic protective cover, safe and reliable use;
 - 3, the filtering precision is 5μm, 40μm optional.

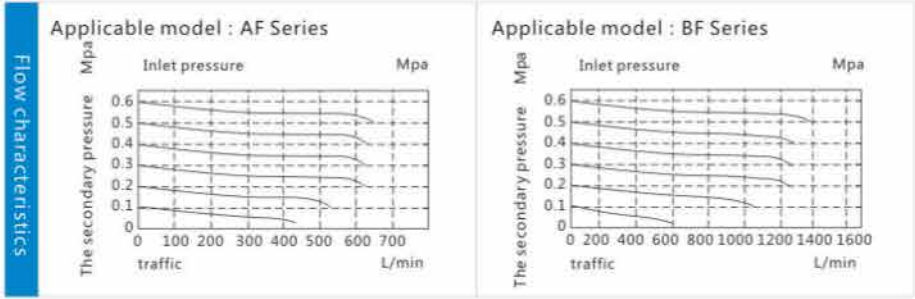

Inner structure

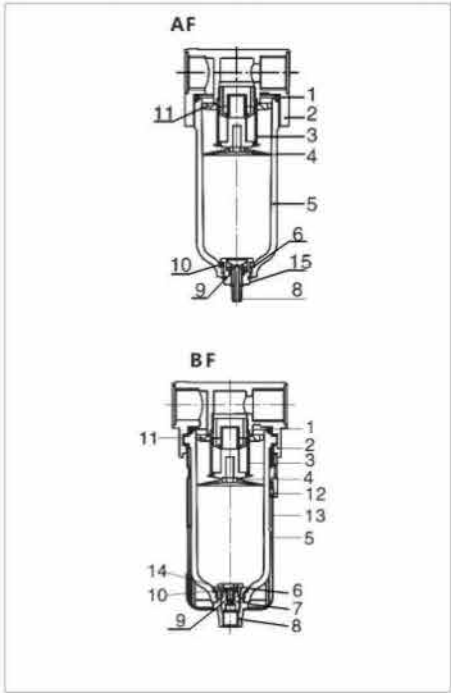

Parts material

Table with 3 columns: No., Item, Material. It lists 15 parts including Drain bowl O-ring, Body, Filter element, Umbrella baffle, Brain bowl, Brain kit, Brain seat, Brain pillar, Spring, Gasket, Air guider, Bowl guard switch, Bowl guard, Drain seat O-ring, and Clip, along with their respective materials.

Overall Dimension

